

WM LIGHT SERIE


The WM LIGHT Series, made of aluminium, is extremely lightweight due to its spring-assisted system. Equipped with a quick connect and release system, the WM Light is easy to transfer from one vehicle to another once the simple location plates are installed. The ramp can be opened directly on to the ground without the use of feet and is available with an anti-slip aluminium surface or in a special aluminium expanded mesh version.



DOCK LOADING PIN



QUICK CONNECTION SYSTEM




EQUIPPED WITH 2 MOBILE PLATES



EQUIPPED WITH WHEELS

DIMENSIONS & LOAD CAPACITY

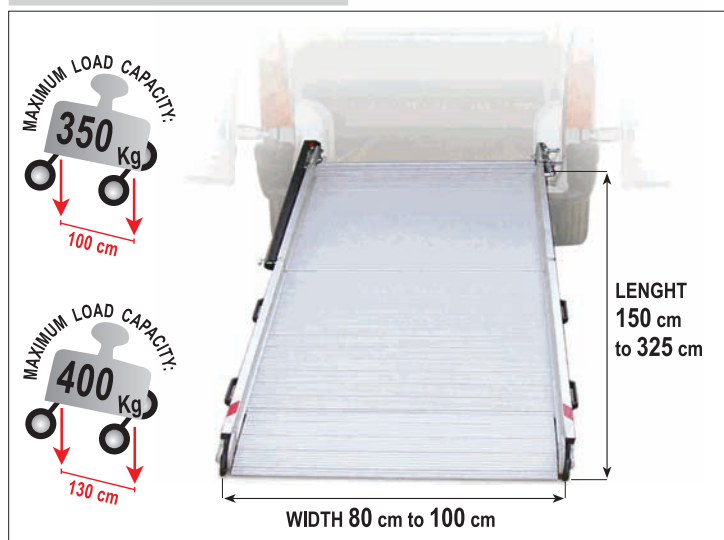

WM LIGHT VERSIONS




Standard: WM LIGHT detachable and free standing.



Optional: WM LIGHT with an outward swivel.



USES

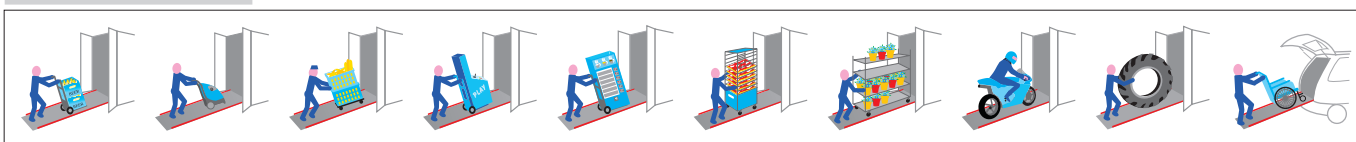


TECHNICAL DATA

A - WM LIGHT anti-slip aluminium MAXIMUM LOAD CAPACITY : **400 Kg**

POWER REQUIRED: **approx 10 Kg**

SPACE REQUIRED: **approx 20 cm**

WARRANTY: **2 years**

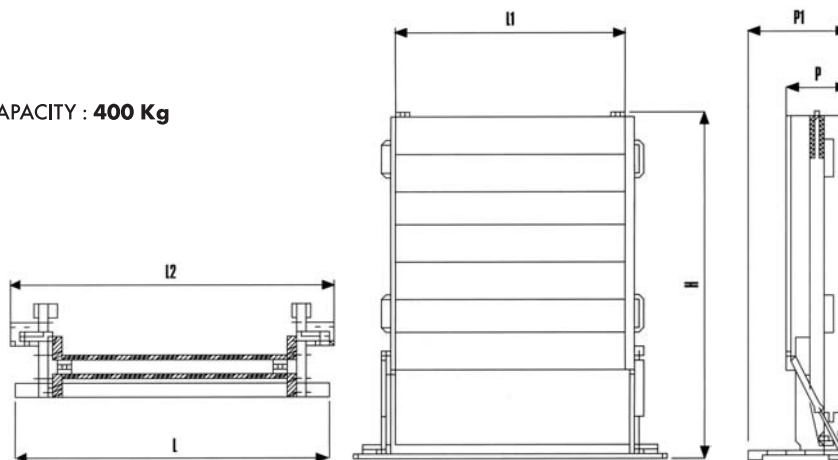


Description	Length	Capacity	H (mm)	L (mm)	L1 (mm)	L2 (mm)	P (mm)	P1 (mm)	Weight
WM LIGHT 80	150 cm	kg 400	835	1100	800	1135	215	345	kg 32
WM LIGHT 80	175 cm	kg 400	960	1100	800	1135	215	345	kg 36
WM LIGHT 80	200 cm	kg 400	1085	1100	800	1110	215	345	kg 40
WM LIGHT 80	225 cm	kg 400	1210	1100	800	1135	215	345	kg 45
WM LIGHT 80	250 cm	kg 400	1335	1100	800	1135	215	345	kg 50
WM LIGHT 80	275 cm	kg 400	1460	1100	800	1110	215	345	kg 55
WM LIGHT 80	300 cm	kg 400	1585	1100	800	1110	215	345	kg 60
WM LIGHT 80	325 cm	kg 400	1705	1100	800	1110	215	345	kg 64
WM LIGHT 100	175 cm	kg 400	960	1300	1000	1310	215	345	kg 42
WM LIGHT 100	200 cm	kg 400	1085	1300	1000	1310	215	345	kg 46
WM LIGHT 100	225 cm	kg 400	1210	1300	1000	1310	215	345	kg 50
WM LIGHT 100	250 cm	kg 400	1335	1300	1000	1310	215	345	kg 54
WM LIGHT 100	275 cm	kg 400	1460	1300	1000	1310	215	345	kg 58
WM LIGHT 100	300 cm	kg 400	1585	1300	1000	1310	215	345	kg 62
WM LIGHT 100	325 cm	kg 400	1705	1300	1000	1310	215	345	kg 66

The loading platform is available in 2 materials:

Anti-slip aluminium



Aluminium expanded mesh



EXTENSION KIT

(fitted directly on to the ramp)

Description	L1 mm	B mm	C mm	A mm	H mm	P mm	P2 mm	Weight kg
KIT for WM 80	800	2500	1205	3705	1335	215	245	16
KIT for WM 80	800	2250	1080	3330	1210	215	245	15
KIT for WM 80	800	2000	955	2955	1085	215	245	14
KIT for WM 80	800	1750	830	2580	960	215	245	13
KIT for WM 80	800	1500	705	2205	835	215	245	12
KIT for WM 100	1000	2500	1205	3705	1335	215	245	17
KIT for WM 100	1000	2250	1080	3330	1210	215	245	16
KIT for WM 100	1000	2000	955	2955	1085	215	245	15
KIT for WM 100	1000	1750	830	2580	960	215	245	14
KIT for WM 100	1000	1500	705	2205	835	215	245	13

