

WM LIGHT PLUS SERIE

The new model of loading ramp Wm Light PLUS is a variant of the Wm Light ramp but with better performances as: the new swivel kit, faster and easier to use, installed as standard on every ramp, the new anchorage base (L-form) which allows to extend the range of widths available, from 40 cm to 120 cm; capacity of 600 kg for the ramps with width from 40 to 95 cm.

As the Wm Light ramp, the Wm Light PLUS is completely made of aluminum, light and handy thanks to the wheel kit and gas spring installed on every ramps. On request, it is available an internal swivel kit, to open the ramp toward the inside.



DOCK LOADING PIN



EQUIPPED WITH 2 MOBILE PLATES



EQUIPPED WITH WHEELS




NEW SWIVEL KIT FASTER AND EASIER



DIMENSIONS & LOAD CAPACITY



USES

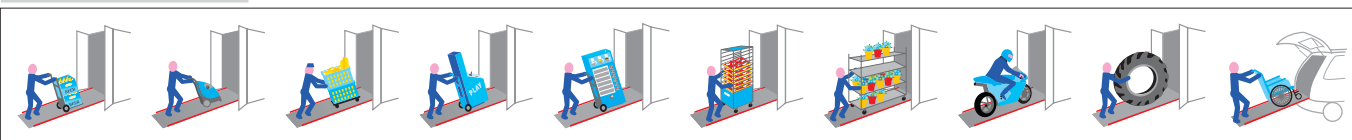

TECHNICAL DATA

WIDTH L1 (mm)	WIDTH L (mm)	LENGTH RAMP A (mm)	HEIGHT H (mm)	CAPACITY (kg)
700	1117,5	2000	1175	600
700	1117,5	2250	1300	600
700	1117,5	2500	1425	600
700	1117,5	2750	1550	600
700	1117,5	3000	1675	600
700	1117,5	3250	1800	600
800	1217,5	2000	1175	600
800	1217,5	2250	1300	600
800	1217,5	2500	1425	600
800	1217,5	2750	1550	600
800	1217,5	3000	1675	600
800	1217,5	3250	1800	600
900	1317,5	2000	1175	600
900	1317,5	2250	1300	600
900	1317,5	2500	1425	600
900	1317,5	2750	1550	600
900	1317,5	3000	1675	600
900	1317,5	3250	1800	600
95	1367,5	2000	1175	600
95	1367,5	2250	1300	600
95	1367,5	2500	1425	600
95	1367,5	2750	1550	600
95	1367,5	3000	1675	600
95	1367,5	3250	1800	600
1000	1417,5	2000	1175	400
1000	1417,5	2250	1300	400
1000	1417,5	2500	1425	400
1000	1417,5	2750	1550	400
1000	1417,5	3000	1675	400
1000	1417,5	3250	1800	400
1050	1467,5	2000	1175	400
1050	1467,5	2250	1300	400
1050	1467,5	2500	1425	400
1050	1467,5	2750	1550	400
1050	1467,5	3000	1675	400
1050	1467,5	3250	1800	400
1100	1517,5	2000	1175	400
1100	1517,5	2250	1300	400
1100	1517,5	2500	1425	400
1100	1517,5	2750	1550	400
1100	1517,5	3000	1675	400
1100	1517,5	3250	1800	400
1200	1617,5	2000	1175	400
1200	1617,5	2250	1300	400
1200	1617,5	2500	1425	400
1200	1617,5	2750	1550	400
1200	1617,5	3000	1675	400
1200	1617,5	3250	1800	400

