

NETWORK POWER



Gel Standby

VRLA Gel Deep Cycle Batteries

POWER FOR TOMORROW TODAY

Gel Standby Bloc Battery

With an extensive product range available Eternity Technologies prides itself on world-class product design, production processes, technical development, cost structure and global location.

Eternity Technologies valve regulated lead-acid batteries for the standby power market. With an innovative Gel-Technology design Eternity Technologies Gel Standby batteries have a reliable maintenance-free and leakage-free construction.

Features of Gel Standby Bloc Batteries...

Maintenance-free bloc batteries in Gel technology
(no topping up during lifetime)

Good high current performance for extreme operating conditions

High-class patented safety valve

Capacity: 51–311 Ah (C_{10})

Low self discharge rate allows for up to 2 years shelf life

Valve-regulated lead-acid battery

Recyclable



Applications...



UPS Systems



Traffic Systems



Telecommunications



Emergency Lighting



Gel Solar Bloc Specification

Type	US Group Type	Voltage	Capacity Ah C ₁₀	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Terminal
N06 06 198	DIN	6	198	243	187	274	32	M8 / AP
N06 06 195 GC2	GC2	6	194	260	180	258	33	M8 / AP / DU / ST
N06 06 263	BIC 305	6	263	302	178	346	45	M8 / AP / DU / ST
N06 06 300	L16	6	311	302	178	405	53	M10 / AP / DU / ST
N06 12 51	DIN L3	12	51	277	175	190	21	A-POLE
N06 12 77	DIN L5	12	77	350	175	190	28	A-POLE
N06 12 48	BCI 34	12	48	254	168	177	18	M6 / AP / DU / ST
N06 12 59	BCI 34	12	59	254	168	175	21	M6 / AP / DU / ST
N06 12 74	BCI 24	12	74	254	168	202.5	25	M6 / AP / DU / ST
N06 12 81	BCI 27	12	81	307	168	211	32	M8 / AP / DU / ST
N06 12 88	BCI 31	12	88	329	170	205	32	M8 / AP / DU / ST
N06 12 116	BCI 12 / 5SHP	12	116	329	170	258	42	M8 / AP / DU / ST
N06 12 121	DIN A	12	121	513	189	196	45	A-POLE
N06 12 150	DIN B	12	150	513	223	196	54	M8 / AP / DU / ST
N06 12 150*	BCI 4D	12	150	513	223	196	54	M8 / AP / DU / ST
N06 12 200	DIN C	12	200	518	274	215	68	M8 / AP / DU / ST
N06 12 200*	BCI 8D	12	200	518	274	215	68	M8 / AP / DU / ST

* Reverse polarity

± 5% weight tolerance

Charging profile

IU Charging I = min. 12% C₅ max. 18% C₅
U = 2.4 V per cell

IUI Charging I₁ = min. 12% C₅ max. 18% C₅
U = 2.35 V per cell
I₂ = 1.5 % C₅ for max. 4 hours

Torque




Torque: 6Nm





Torque: 8Nm



Torque: 10Nm



Height is an additional 20mm for A-Terminal, Dual & Stud



Constant current discharge data

1.85 VpC	Discharge in A at 20°C												
	5 m	10 m	15 m	20 m	30 m	45 m	1 h	2 h	3 h	4 h	5 h	8 h	10 h
N06 06 198	283.9	230.6	196.8	176.9	148.7	122.1	100.4	64.8	47.8	37.9	31.9	21.7	18.8
N06 06 195 GC2	278.1	226.0	192.9	173.4	145.7	119.6	98.4	63.5	46.8	37.1	31.3	21.2	18.4
N06 06 263	377.0	306.3	261.5	235.0	197.5	162.1	133.4	86.1	63.5	50.3	42.4	28.8	24.9
N06 06 300	445.9	362.3	309.2	277.9	233.5	191.7	157.7	101.8	75.1	59.5	50.1	34.0	29.5
N06 12 51	73.1	59.4	50.7	45.6	38.3	31.4	25.9	16.7	12.3	9.7	8.2	5.6	4.8
N06 12 77	110.4	89.7	76.6	68.8	57.8	47.5	39.0	25.2	18.6	14.7	12.4	8.4	7.3
N06 12 48	68.8	55.9	47.7	42.9	36.0	29.6	24.3	15.7	11.6	9.2	7.7	5.3	4.6
N06 12 59	84.6	68.7	58.7	52.7	44.3	36.4	29.9	19.3	14.2	11.3	9.5	6.5	5.6
N06 12 74	106.1	86.2	73.6	66.1	55.6	45.6	37.5	24.2	17.9	14.1	11.9	8.1	7.0
N06 12 81	116.1	94.3	80.5	72.4	60.8	49.9	41.1	26.5	19.6	15.5	13.1	8.9	8.3
N06 12 88	126.2	102.5	87.5	78.6	66.1	54.2	44.6	28.8	21.2	16.8	14.2	9.6	7.7
N06 12 116	166.3	135.1	115.3	103.7	87.1	71.5	58.8	38.0	28.0	22.2	18.7	12.7	11.0
N06 12 121	173.5	140.9	120.3	108.1	90.9	74.6	61.4	39.6	29.2	23.1	19.5	13.2	11.5
N06 12 150	215.0	174.7	149.1	134.0	112.6	92.5	76.1	49.1	36.2	28.7	24.2	16.4	14.2
N06 12 200	286.7	233.0	198.8	178.7	150.2	123.3	101.4	65.5	48.3	38.2	32.2	21.9	19.0

1.80 VpC	Discharge in A at 20°C												
	5 m	10 m	15 m	20 m	30 m	45 m	1 h	2 h	3 h	4 h	5 h	8 h	10 h
N06 06 198	340.4	278.8	231.3	199.9	164.2	133.3	107.9	68.0	49.8	39.4	33.1	22.4	19.8
N06 06 195 GC2	333.5	273.2	226.6	195.9	160.9	130.6	105.7	66.6	48.8	38.6	32.4	21.9	19.4
N06 06 263	452.1	370.4	307.3	265.5	218.1	177.1	143.3	90.3	66.2	52.4	43.9	29.8	26.3
N06 06 300	534.6	438.0	363.3	314.0	257.9	209.4	169.4	106.8	78.3	61.9	52.0	35.2	31.1
N06 12 51	87.7	71.8	59.6	51.5	42.3	34.3	27.8	17.5	12.8	10.2	8.5	5.8	5.1
N06 12 77	132.4	108.4	90.0	77.7	63.8	51.8	41.9	26.4	19.4	15.3	12.9	8.7	7.7
N06 12 48	82.5	67.6	56.1	48.5	39.8	32.3	26.1	16.5	12.1	9.6	8.0	5.4	4.8
N06 12 59	101.4	83.1	68.9	59.6	48.9	39.7	32.1	20.3	14.8	11.7	9.9	6.7	5.9
N06 12 74	127.2	104.2	86.5	74.7	61.4	49.8	40.3	25.4	18.6	14.7	12.4	8.4	7.4
N06 12 81	139.2	114.1	94.6	81.8	67.2	54.5	44.1	27.8	20.4	16.1	13.5	9.2	8.1
N06 12 88	151.3	123.9	102.8	88.9	73.0	59.2	47.9	30.2	22.1	17.5	14.7	10.0	8.8
N06 12 116	199.4	163.4	135.5	117.1	96.2	78.1	63.2	39.8	29.2	23.1	19.4	13.1	11.6
N06 12 121	208.0	170.4	141.4	122.2	100.3	81.5	65.9	41.6	30.4	24.1	20.2	13.7	12.1
N06 12 150	257.9	211.2	175.2	151.5	124.4	101.0	81.7	51.5	37.7	29.9	25.1	17.0	15.0
N06 12 200	343.8	281.7	233.7	201.9	165.8	134.6	108.9	68.7	50.3	39.8	33.4	22.6	20.0

1.75 VpC	Discharge in A at 20°C												
	5 m	10 m	15 m	20 m	30 m	45 m	1 h	2 h	3 h	4 h	5 h	8 h	10 h
N06 06 198	385.8	312.0	256.3	217.4	173.9	139.4	112.3	69.7	50.8	40.1	33.5	22.7	19.8
N06 06 195 GC2	378.1	305.7	251.1	213.0	170.4	136.6	110.0	68.3	49.7	39.3	32.9	22.2	19.4
N06 06 263	512.5	414.5	340.4	288.7	231.0	185.2	149.1	92.6	67.4	53.2	44.6	30.1	26.3
N06 06 300	606.1	490.1	402.5	341.4	273.2	219.0	176.3	109.5	79.7	62.9	52.7	35.6	31.1
N06 12 51	99.4	80.4	66.0	56.0	44.8	35.9	28.9	18.0	13.1	10.3	8.6	5.8	5.1
N06 12 77	150.1	121.4	99.7	84.5	67.6	54.2	43.7	27.1	19.7	15.6	13.0	8.8	7.7
N06 12 48	93.5	75.6	62.1	52.7	42.2	33.8	27.2	16.9	12.3	9.7	8.1	5.5	4.8
N06 12 59	115.0	93.0	76.4	64.8	51.8	41.5	33.5	20.8	15.1	11.9	10.0	6.8	5.9
N06 12 74	144.2	116.6	95.8	81.2	65.0	52.1	42.0	26.0	19.0	15.0	12.5	8.5	7.4
N06 12 81	157.8	127.7	104.8	88.9	71.2	57.0	45.9	28.5	20.8	16.4	13.7	9.3	8.1
N06 12 88	171.5	138.7	113.9	96.6	77.3	62.0	49.9	31.0	22.6	17.8	14.9	10.1	8.8
N06 12 116	226.1	182.8	150.1	127.4	101.9	81.7	65.8	40.8	29.7	23.5	19.7	13.3	11.6
N06 12 121	235.8	190.7	156.6	132.8	106.3	85.2	68.6	42.6	31.0	24.5	20.5	13.9	12.1
N06 12 150	292.3	236.4	194.1	164.7	131.8	105.6	85.1	52.8	38.5	30.4	25.4	17.2	15.0
N06 12 200	389.7	315.2	258.9	219.6	175.7	140.8	113.4	70.4	51.3	40.5	33.9	22.9	20.0

1.70 VpC	Discharge in A at 20°C												
	5 m	10 m	15 m	20 m	30 m	45 m	1 h	2 h	3 h	4 h	5 h	8 h	10 h
N06 06 198	436.0	336.7	275.8	231.2	179.4	143.1	114.1	70.1	51.1	40.3	33.9	22.8	19.8
N06 06 195 GC2	427.2	329.9	270.2	226.5	175.8	140.2	111.8	68.7	50.1	39.5	33.2	22.3	19.4
N06 06 263	579.2	447.2	366.3	307.0	238.3	190.1	151.6	93.2	67.9	53.6	45.0	30.2	26.3
N06 06 300	684.9	528.9	433.1	363.1	281.8	224.8	179.2	110.2	80.3	63.3	53.3	35.8	31.1
N06 12 51	112.3	86.7	71.0	59.5	46.2	36.9	29.4	18.1	13.2	10.4	8.7	5.9	5.1
N06 12 77	169.6	130.9	107.2	89.9	69.8	55.7	44.4	27.3	19.9	15.7	13.2	8.9	7.7
N06 12 48	105.7	81.6	66.8	56.0	43.5	34.7	27.7	17.0	12.4	9.8	8.2	5.5	4.8
N06 12 59	129.9	100.3	82.2	68.9	53.5	42.7	34.0	20.9	15.2	12.0	10.1	6.8	5.9
N06 12 74	163.0	125.8	103.1	86.4	67.1	53.5	42.6	26.2	19.1	15.1	12.7	8.5	7.4
N06 12 81	178.4	137.7	112.8	94.6	73.4	58.6	46.7	28.7	20.9	16.5	13.9	9.3	8.1
N06 12 88	193.8	149.6	122.6	102.7	79.8	63.6	50.7	31.2	22.7	17.9	15.1	10.1	8.8
N06 12 116	255.5	197.3	161.6	135.4	105.1	83.9	66.8	41.1	30.0	23.6	19.9	13.3	11.6
N06 12 121	266.5	205.8	168.5	141.3	109.7	87.5	69.7	42.9	31.2	24.6	20.7	13.9	12.1
N06 12 150	330.3	255.1	208.9	175.1	135.9	108.4	86.4	53.1	38.7	30.6	25.7	17.2	15.0
N06 12 200	440.5	340.1	278.5	233.5	181.3	144.6	115.3	70.9	51.6	40.7	34.3	23.0	20.0

1.65 VpC	Discharge in A at 20°C												
	5 m	10 m	15 m	20 m	30 m	45 m	1 h	2 h	3 h	4 h	5 h	8 h	10 h
N06 06 198	482.1	356.7	288.1	240.9	182.5	144.5	115.6	70.7	51.4	40.4	34.0	22.8	19.8
N06 06 195 GC2	472.3	349.5	282.3	236.0	178.8	141.6	113.3	69.2	50.3	39.6	33.3	22.3	19.4
N06 06 263	640.3	473.8	382.7	320.0	242.4	191.9	153.6	93.9	68.2	53.7	45.1	30.2	26.3
N06 06 300	757.2	560.3	452.6	378.4	286.7	227.0	181.6	111.0	80.7	63.5	53.4	35.8	31.1
N06 12 51	124.2	91.9	74.2	62.1	47.0	37.2	29.8	18.2	13.2	10.4	8.8	5.9	5.1
N06 12 77	187.5	138.7	112.1	93.7	71.0	56.2	45.0	27.5	20.0	15.7	13.2	8.9	7.7
N06 12 48	116.9	86.5	69.8	58.4	44.2	35.0	28.0	17.1	12.4	9.8	8.2	5.5	4.8
N06 12 59	143.7	106.3	85.9	71.8	54.4	43.1	34.5	21.1	15.3	12.1	10.1	6.8	5.9
N06 12 74	180.2	133.3	107.7	90.0	68.2	54.0	43.2	26.4	19.2	15.1	12.7	8.5	7.4
N06 12 81	197.2	145.9	117.9	98.6	74.7	59.1	47.3	28.9	21.0	16.5	13.9	9.3	8.1
N06 12 88	214.3	158.5	128.1	107.1	81.1	64.2	51.4	31.4	22.8	18.0	15.1	10.1	8.8
N06 12 116	282.4	209.0	168.8	141.1	106.9	84.7	67.7	41.4	30.1	23.7	19.9	13.3	11.6
N06 12 121	294.6	218.0	176.1	147.2	111.5	88.3	70.7	43.2	31.4	24.7	20.8	13.9	12.1
N06 12 150	365.2	270.2	218.3	182.5	138.3	109.5	87.6	53.5	38.9	30.6	25.8	17.2	15.0
N06 12 200	487.0	360.3	291.0	243.3	184.4	146.0	116.8	71.4	51.9	40.8	34.3	23.0	20.0

1.60 VpC	Discharge in A at 20°C												
	5 m	10 m	15 m	20 m	30 m	45 m	1 h	2 h	3 h	4 h	5 h	8 h	10 h
N06 06 198	520.8	370.9	295.7	245.4	185.4	145.9	115.8	70.6	51.4	40.4	34.0	22.8	19.8
N06 06 195 GC2	510.3	363.4	289.7	240.5	181.7	142.9	113.5	69.2	50.4	39.6	33.3	22.3	19.4
N06 06 263	691.8	492.7	392.7	326.0	246.3	193.8	153.8	93.8	68.3	53.7	45.1	30.2	26.3
N06 06 300	818.0	582.6	464.4	385.5	291.3	229.1	181.9	110.9	80.7	63.5	53.4	35.8	31.1
N06 12 51	134.1	95.5	76.2	63.2	47.8	37.6	29.8	18.2	13.2	10.4	8.8	5.9	5.1
N06 12 77	202.5	144.2	115.0	95.4	72.1	56.7	45.0	27.5	20.0	15.7	13.2	8.9	7.7
N06 12 48	126.3	89.9	71.7	59.5	45.0	35.4	28.1	17.1	12.5	9.8	8.2	5.5	4.8
N06 12 59	155.2	110.5	88.1	73.1	55.3	43.5	34.5	21.0	15.3	12.1	10.1	6.8	5.9
N06 12 74	194.6	138.6	110.5	91.7	69.3	54.5	43.3	26.4	19.2	15.1	12.7	8.5	7.4
N06 12 81	213.0	151.7	120.9	100.4	75.9	59.7	47.4	28.9	21.0	16.5	13.9	9.3	8.1
N06 12 88	231.5	164.8	131.4	109.1	82.4	64.8	51.5	31.4	22.8	18.0	15.1	10.1	8.8
N06 12 116	305.1	217.3	173.2	143.8	108.6	85.5	67.8	41.4	30.1	23.7	19.9	13.3	11.6
N06 12 121	318.3	226.7	180.7	150.0	113.3	89.1	70.8	43.2	31.4	24.7	20.8	13.9	12.1
N06 12 150	394.5	281.0	224.0	185.9	140.5	110.5	87.7	53.5	38.9	30.6	25.8	17.2	15.0
N06 12 200	526.0	374.6	298.6	247.9	187.3	147.3	117.0	71.3	51.9	40.8	34.3	23.0	20.0

Constant power discharge data

1.85 VpC	Discharge W/Bloc												
	5 m	10 m	15 m	20 m	30 m	45 m	1 h	2 h	3 h	4 h	5 h	8 h	10 h
N06 06 198	1576.8	1281.1	1093.5	982.9	830.3	685.2	563.6	367.9	274.1	218.5	184.3	125.1	106.0
N06 06 195 GC2	1544.9	1255.2	1071.4	963.0	813.5	671.3	552.3	360.5	268.6	214.1	180.6	122.5	103.8
N06 06 263	2098.5	1705.0	1455.3	1308.1	1104.6	914.9	752.7	489.9	363.5	287.6	242.5	166.3	143.7
N06 06 300	2481.5	2016.2	1720.9	1546.8	1306.2	1081.9	890.1	579.3	429.9	340.1	286.8	196.7	169.9
N06 12 51	812.3	660.0	563.3	506.3	427.7	353.0	290.4	189.5	141.2	112.6	94.9	64.4	54.6
N06 12 77	1226.4	996.4	850.5	764.5	645.8	532.9	438.4	286.1	213.2	169.9	143.3	97.3	82.4
N06 12 48	764.5	621.1	530.2	476.5	402.5	332.2	273.3	178.4	132.9	105.9	89.3	60.6	51.4
N06 12 59	939.7	763.5	651.7	585.8	494.8	408.3	335.9	219.3	163.3	130.2	109.8	74.5	63.2
N06 12 74	1178.6	957.6	817.3	734.7	620.6	512.1	421.3	275.0	204.9	163.3	137.7	93.5	79.2
N06 12 81	1290.1	1048.2	894.7	804.2	679.3	560.6	461.2	301.0	224.3	178.8	150.8	102.3	86.7
N06 12 88	1401.6	1138.8	972.0	873.7	738.0	609.0	501.0	327.0	243.6	194.2	163.8	111.2	94.2
N06 12 116	1847.5	1501.1	1281.2	1151.6	972.8	802.8	660.4	431.1	321.2	256.0	215.9	146.5	124.2
N06 12 121	1927.2	1565.8	1365.5	1201.3	1014.8	837.4	688.9	449.7	335.0	267.1	225.2	152.8	129.5
N06 12 150	2389.0	1941.1	1656.8	1489.2	1258.0	1038.1	854.0	557.4	415.3	331.1	279.2	189.5	160.6
N06 12 200	3185.4	2588.1	2209.0	1985.6	1677.3	1384.1	1138.7	743.2	553.7	441.4	372.3	252.6	214.1

1.80 VpC	Discharge W/Bloc												
	5 m	10 m	15 m	20 m	30 m	45 m	1 h	2 h	3 h	4 h	5 h	8 h	10 h
N06 06 198	1842.3	1509.3	1252.1	1082.1	898.2	735.0	594.7	381.4	282.5	226.4	189.9	128.1	113.2
N06 06 195 GC2	1805.1	1478.8	1226.8	1060.2	880.0	720.1	582.7	373.7	276.8	221.8	186.1	125.5	110.9
N06 06 263	2445.2	2003.3	1661.8	1436.2	1188.0	978.7	791.9	506.8	374.7	299.0	250.9	171.1	151.3
N06 06 300	2891.5	2368.9	1965.1	1698.4	1404.8	1157.3	936.4	599.3	443.1	353.5	296.7	202.4	178.9
N06 12 51	949.1	777.5	645.0	557.4	462.7	378.6	306.4	196.5	145.5	116.6	97.8	66.0	58.3
N06 12 77	1432.9	1173.9	973.8	841.6	698.6	571.6	462.5	296.7	219.7	176.1	147.7	99.7	88.0
N06 12 48	893.2	731.8	607.1	524.6	435.5	356.3	288.3	184.9	137.0	109.7	92.1	62.1	54.9
N06 12 59	1097.9	899.5	746.2	644.9	535.5	438.0	354.4	227.3	168.4	134.9	113.2	76.4	67.4
N06 12 74	1377.1	1128.2	935.9	808.8	671.4	549.4	444.5	285.1	211.2	169.2	142.0	95.8	84.6
N06 12 81	1507.3	1234.9	1024.4	885.3	734.9	601.3	486.6	312.1	231.1	185.2	155.4	104.8	92.6
N06 12 88	1637.6	1341.6	1112.9	961.9	798.4	653.3	528.6	339.1	251.1	201.2	168.8	113.9	100.6
N06 12 116	2158.7	1768.5	1467.1	1267.9	1052.4	861.2	696.8	446.9	331.0	265.2	222.5	150.1	132.6
N06 12 121	2251.7	1844.7	1530.3	1322.6	1097.8	898.3	726.8	466.2	345.3	276.7	232.1	156.6	138.3
N06 12 150	2791.4	2286.8	1897.1	1639.5	1360.9	1113.6	901.0	577.9	428.0	343.0	287.8	194.1	171.5
N06 12 200	3721.8	3049.1	2529.4	2186.0	1814.5	1484.8	1201.4	770.6	570.7	457.3	383.7	258.9	228.6


1.75 VpC	Discharge W/Bloc												
	5 m	10 m	15 m	20 m	30 m	45 m	1 h	2 h	3 h	4 h	5 h	8 h	10 h
N06 06 198	2036.2	1646.7	1352.4	1147.2	929.7	754.2	607.4	386.6	285.8	226.0	189.2	129.4	113.9
N06 06 195 GC2	1995.1	1613.5	1325.1	1124.0	910.9	739.0	595.1	378.8	280.1	221.4	185.3	126.8	111.6
N06 06 263	2706.1	2188.5	1797.3	1524.6	1233.7	1004.2	808.7	514.4	378.9	302.7	253.4	171.7	151.1
N06 06 300	3200.0	2587.9	2125.3	1802.8	1458.8	1187.5	956.3	608.3	448.1	358.0	299.6	203.1	178.7
N06 12 51	1049.0	848.3	696.7	591.0	478.9	388.5	312.9	199.2	147.2	116.4	97.4	66.7	58.7
N06 12 77	1583.7	1280.8	1051.9	892.3	723.1	586.6	472.4	300.7	222.3	175.8	147.1	100.7	88.6
N06 12 48	987.3	798.4	655.7	556.2	450.7	365.7	294.5	187.4	138.6	109.6	91.7	62.8	55.2
N06 12 59	1213.5	981.4	806.0	683.7	554.0	449.5	362.0	230.4	170.3	134.7	112.7	77.1	67.9
N06 12 74	1522.0	1230.9	1010.9	857.5	694.9	563.7	454.0	289.0	213.7	168.9	141.4	96.8	85.2
N06 12 81	1666.0	1347.3	1106.5	938.6	760.6	617.1	496.9	316.3	233.9	184.9	154.8	105.9	93.2
N06 12 88	1810.0	1563.8	1202.1	1019.7	826.4	670.4	539.9	343.6	254.1	200.9	168.1	115.1	101.3
N06 12 116	2385.9	1929.5	1584.6	1344.2	1089.3	883.7	711.7	453.0	334.9	264.8	221.6	151.7	133.5
N06 12 121	2488.7	2012.7	1652.9	1402.1	1136.2	921.8	742.4	472.5	349.4	276.2	231.2	158.2	139.2
N06 12 150	3085.2	2495.1	2049.1	1738.2	1408.6	1142.7	920.3	585.7	433.1	342.4	286.6	196.1	172.6
N06 12 200	4113.6	3326.7	2732.1	2317.6	1878.1	1523.6	1227.0	781.0	577.5	456.6	382.1	261.5	230.1

1.70 VpC	Discharge W/Bloc												
	5m	10m	15m	20m	30m	45m	1h	2h	3h	4h	5h	8h	10h
N06 06 198	2250.0	1737.4	14522.9	1192.8	942.1	772.3	615.6	387.2	287.1	230.0	193.4	129.8	113.9
N06 06 195 GC2	2204.6	1702.3	1394.1	1168.7	923.0	756.7	603.2	379.4	281.3	225.3	189.5	127.2	111.6
N06 06 263	2982.1	2302.7	1885.8	1580.8	1247.6	1025.5	817.5	516.4	381.5	303.6	255.2	172.2	151.1
N06 06 300	3526.3	2723.0	2230.0	1869.4	1475.3	1212.6	966.7	610.6	451.2	359.0	301.8	203.6	178.7
N06 12 51	1159.1	895.0	733.0	614.5	485.3	397.8	317.1	199.5	147.9	118.5	99.6	66.9	58.7
N06 12 77	1750.0	1351.3	1106.7	927.7	732.7	600.6	478.8	301.2	223.3	178.9	150.4	101.0	88.6
N06 12 48	1090.9	842.4	689.9	578.3	456.8	374.4	298.5	187.7	139.2	111.5	93.8	62.9	55.2
N06 12 59	1340.9	1035.4	848.0	710.8	561.4	460.2	366.9	230.8	171.1	137.1	115.2	77.4	67.9
N06 12 74	1681.8	1298.7	1063.6	891.6	704.2	577.2	460.1	289.4	214.6	171.9	144.5	97.0	85.2
N06 12 81	1882.8	1453.8	1190.6	998.1	784.7	633.5	505.0	318.3	235.6	186.1	156.5	106.2	93.2
N06 12 88	2045.5	1579.5	1293.5	1084.3	852.5	688.3	548.7	345.8	255.9	202.2	170.0	115.4	101.3
N06 12 116	2636.4	2035.8	1667.2	1397.6	1103.8	904.9	721.3	453.7	336.4	269.5	226.6	152.1	133.5
N06 12 121	2750.0	2123.5	1739.1	1457.8	1151.4	943.9	752.4	473.3	350.9	281.1	236.4	158.7	139.2
N06 12 150	3409.1	2632.5	2155.9	1807.2	1427.4	1170.1	932.7	586.7	435.0	348.5	293.0	196.7	172.6
N06 12 200	4545.5	3510.0	2874.5	2409.6	1903.2	1560.1	1243.6	782.2	580.0	464.6	390.7	262.3	230.1

1.65 VpC	Discharge W/Bloc												
	5m	10m	15m	20m	30m	45m	1h	2h	3h	4h	5h	8h	10h
N06 06 198	2419.1	1790.0	1445.8	1208.8	938.3	742.9	618.1	391.3	288.4	230.6	193.9	129.8	113.9
N06 06 195 GC2	2370.2	1753.9	1416.6	1184.4	919.4	727.8	605.6	383.4	282.5	226.0	189.9	127.2	111.6
N06 06 263	3181.9	2354.5	1901.7	1590.0	1241.4	1006.7	821.8	521.6	383.2	305.5	256.8	170.9	149.7
N06 06 300	3762.6	2784.2	2248.8	1880.2	1468.0	1190.4	971.8	616.7	453.1	361.5	303.7	202.1	177.1
N06 12 51	1246.2	922.1	744.8	622.7	483.4	382.7	318.4	201.6	148.6	118.8	99.9	66.9	58.7
N06 12 77	1881.5	1392.3	1124.5	940.2	729.8	577.8	480.7	304.3	224.3	179.4	150.8	101.0	88.6
N06 12 48	1172.9	867.9	701.0	586.1	454.9	360.2	299.7	189.7	139.8	111.8	94.0	62.9	55.2
N06 12 59	1441.7	1066.8	861.7	720.4	559.2	442.7	368.3	233.2	171.9	137.4	115.5	77.4	67.9
N06 12 74	1808.2	1338.0	1080.7	903.6	701.4	555.3	462.0	292.5	215.5	172.4	144.9	97.0	85.2
N06 12 81	1979.3	1464.6	1183.0	989.0	767.7	607.8	505.7	320.1	235.9	188.7	158.6	106.2	93.2
N06 12 88	2150.3	1591.2	1285.2	1074.5	834.1	660.3	549.4	347.8	256.3	205.0	172.3	115.4	101.3
N06 12 116	2834.5	2097.4	1694.1	1416.4	1099.4	870.4	724.2	458.5	337.9	270.2	227.1	152.1	133.5
N06 12 121	2956.7	2187.8	1767.1	1477.5	1146.8	907.9	755.4	478.2	352.4	281.9	236.9	158.7	139.2
N06 12 150	3665.3	2712.2	2190.7	1831.6	1421.7	1125.5	936.4	592.9	436.9	349.4	293.7	196.7	172.6
N06 12 200	4887.1	3616.3	2920.9	2442.1	1895.6	1500.7	1248.6	790.5	582.6	465.9	391.6	262.3	230.1

1.60 VpC	Discharge W/Bloc												
	5m	10m	15m	20m	30m	45m	1h	2h	3h	4h	5h	8h	10h
N06 06 198	2555.7	1820.1	1450.9	1204.3	944.5	783.1	621.7	391.1	288.7	230.6	193.9	129.8	113.9
N06 06 195 GC2	2504.0	1783.3	1421.5	1180.0	925.4	767.3	609.2	383.2	282.8	226.0	189.9	127.2	111.6
N06 06 263	3397.9	2419.9	1929.0	1601.2	1257.3	1037.3	823.5	521.3	383.6	305.5	256.8	170.9	149.7
N06 06 300	4018.0	2861.6	2281.1	1893.4	1486.8	1226.6	973.8	616.5	453.6	361.3	303.7	202.1	177.1
N06 12 51	1316.5	937.6	747.4	620.4	486.5	403.4	320.3	201.5	148.7	118.8	99.9	66.9	58.7
N06 12 77	1987.7	1415.6	1128.4	936.7	734.6	609.1	483.6	304.2	224.5	179.4	150.8	101.0	88.6
N06 12 48	1239.1	882.5	703.4	583.9	457.9	379.7	301.4	189.6	140.0	111.8	94.0	62.9	55.2
N06 12 59	1523.1	1084.7	864.7	717.7	562.9	466.7	370.5	233.1	172.0	137.4	115.5	77.4	67.9
N06 12 74	1910.3	1360.5	1084.5	900.2	706.0	585.4	464.7	292.3	215.8	172.4	144.9	97.0	85.2
N06 12 81	2091.0	1489.2	1187.1	985.3	772.7	640.7	508.7	320.0	236.2	188.7	158.6	106.2	93.2
N06 12 88	2271.7	1617.8	1289.7	1070.5	839.5	696.1	552.6	347.6	256.6	205.0	172.3	115.4	101.3
N06 12 116	2994.5	2132.6	1700.0	1411.1	1106.6	917.6	728.5	458.3	338.2	270.2	227.1	152.1	133.5
N06 12 121	3123.6	2224.5	1773.3	1471.9	1154.3	957.1	759.9	478.0	352.8	281.9	236.9	158.7	139.2
N06 12 150	3872.2	2757.7	2198.3	1824.7	1431.0	1186.5	942.0	592.6	437.4	349.4	293.7	196.7	172.6
N06 12 200	5162.9	3676.9	2931.0	2432.9	1908.0	1582.1	1256.0	790.1	583.2	465.9	391.6	262.3	230.1

**A global leader in the industrial battery
market providing world-class products
for Motive Power and Network Power
applications.**

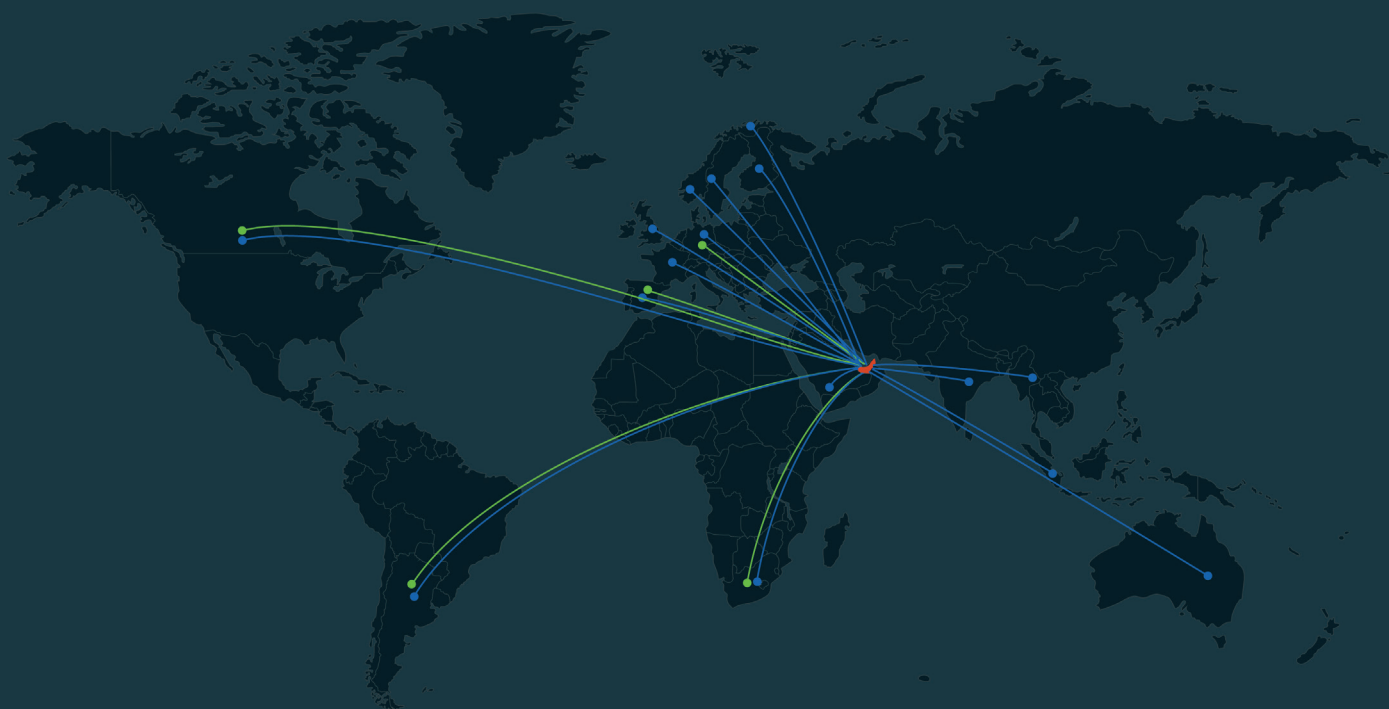

Eternity Technologies FZ-LLC

Al Jazeera / Al Hamra, PO Box 35102,
Ras Al Khaimah, UAE

Sales & service

info@eternitytechnologies.com

www.eternitytechnologies.com

